

**Applications:**


- High Speed Modems
- CIMs
- Hybrid Fiber Coax(HFC Networks)
- CATV

**Features/Benefits:**

- Provides a truly cylindrical coaxial contact
- 30 dB return loss to 1 GHz
- Multiple PCB mount packages
- SMD, edge mount, right angle and straight
- Accommodate .022-.042in. center conductor sizes



**Specifications:**

- Impedance 75Ω
- RF Leakage -100dB min. @ 1 GHz
- Temperature Range -40°C to +140°C

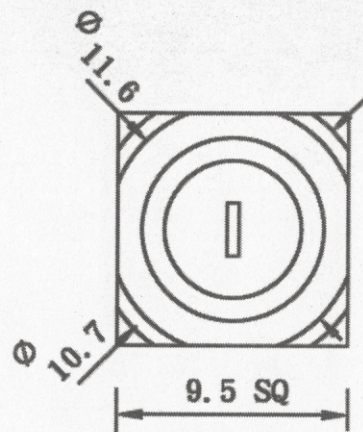

**Mounting Holes**

Dia 2.5x5 Holes

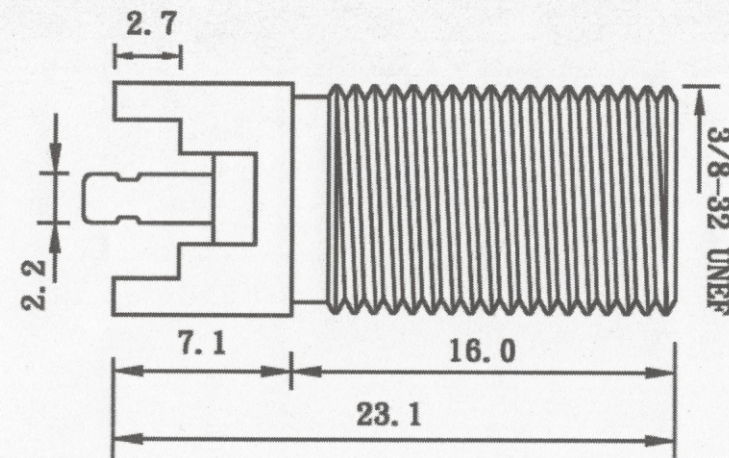

3	Insulator	Delrin	None
2	Contact	PH/Bronze	Tin
1	Body	Brass	Nickel
No	Description	Material	Finish

**Artikelnummer**

0403058

**Artikeltext**

F-Einbaubuchse, Printmontage, gerade Ausf. 180°

**BKL - ELECTRONIC Kreimendahl GmbH ~ Märkenstück 14 ~ 58509 Lüdenscheid**

Telefon +49(0)2351/3621-0 ~ Telefax +49(0)2351/3621-29 ~ E-Mail: info@bkl-electronic.de ~ www.bkl-electronic.de